



PRICE OF TENDER : Rs. 500/-

भारत सरकार / Government of India  
भारतीय पुरातत्व सर्वेक्षण / Archaeological Survey of India  
जोधपुर मंडल, जोधपुर / Jodhpur Circle

**Tender No: 21 /2015-16**

F.No. 04/76/JDH/Fencing/

CTR/V.Stambh/15-16/-W

### PERCENTAGE TENDER FOR EXECUTION OF WORK

Issued to: \_\_\_\_\_

**Date of Opening: 19.11.2015**

Name of Work: **Fencing of Protected Area- From Rear Gate of Vijay Stambh to Kumbhshyam Temple Part (A) at Chittaurgarh Fort, Distt. Chittaurgarh (Rajasthan).**

I/We hereby tender for execution of work for the President of India described in the under mentioned memorandum according to the specification within the time specified and at the rates specified therein subject to the conditions of the contract.

#### MEMORANDUM

- (i) Earnest Money: **Rs. 82,188/-** (ii) Security Deposit: As per the terms and condition
- (iii) PAYABLE IMMEDIATELY ON THE ACCEPTANCE OF TENDER: EMD will be adjusted against the total Security Deposit/returned on submission of FDR for full amount
- (iv) PERCENTAGE TO BE DEDUCTED FROM RUNNING BILL: Remaining amount will be deducted as per the rates given in the terms and conditions
- (v) ESTIMATED COST: **Rs. 41, 09,412/-**
- (vi) PLACE OF WORK: **At the situated at Chittaurgarh Fort, Distt. Chittaurgarh (Rajasthan)**

**READ TERMS AND CONDITIONS BEFORE FILLING UP THE SCHEDULE. SIGN ON ALL PAGES**

S.No	Description or specification of items of work to be executed	Total Estimated quantities	Time allowed for completion	Unit	% Above or % below or equal to in figures and words and attest with signature	Remarks
2.	Provision for removal of Eight line barbed wire of existing fencing area for construction of C.R. Stone masonry dwarf wall and for fixing of M.S. Railing/Grill etc. complete.		<b>60 days from the date of issue of work order.</b>			% to be quoted for full work
(A)	Rear gate Vijay Stambh to Kumbhshyam Temple	434.0 Rmt	<b>For any</b>	Rmt		

			<u>reason no extension of time will be given</u>			
3.	Provision for taking out of M.S. Angle (size-50X50X6mm) embodied in concrete block (0.25X0.25X0.30m) and Stacking it at proper place etc. complete.					
(A)	Rear gate Vijay Stambh to Kumbhshyam temple	235 Nos		Nos		
4.	Provision for making the working space and way for execution of work by removal of bushes, shrubs, grass, small vegetation, and disposal it 200 meter lead etc. complete.					
(A)	Rear gate Vijay Stambh to Kumbhshyam temple	2335.0 Sqm		Sqm		
5.	Provision for exposing / cleaning of deposit soil / malba / debries including sorting out serviceable stones & stacking it at proper place for re-use and disposal of the unserviceable material / malba / debries up to lead 200 mtr and then disposal of malba by mechanical transportation within lead up to 3 Km etc complete.					
(A)	Rear gate Vijay Stambh to Kumbhshyam Temple	672.40 Cum		Cum		
6.	Provision for removing of Loose dry R.R. stone Masonry wall for making the working space for Construction of dwarf wall with very carefully including sorting out serviceable stones and stacking it for re use and disposal of unserviceable materials up to lead 200 mrt. etc. complete					
(A)	Rear gate Vijay Stambh to Kumbhshyam temple	315.73 Cum		Cum		

7.	Provision for earth work excavation for foundation in hard soil mixed with stone boulders including levelling, dressing, and throwing the excavated earth approx lead up to 200 mtr by head load etc. complete.					
(A)	Rear gate Vijay Stambh to Kumbhshyam temple	261.52 Cum		Cum		
8.	Provision for providing & laying cement concrete 1: 3: 6 (1 Cement: 3 C. Sand: 6 Stone Agg. 20 mm nominal size) including curing etc. complete in foundation.					
(A)	Rear gate Vijay Stambh to Kumbhshyam temple	37.36 Cum		Cum		
9.	Provision for R.R. stone masonry in foundation of dwarf wall in cement coarse sand mortar 1:5 (1cement: 5 Coarse Sand) including curing etc. complete.					
(A)	Rear gate Vijay Stambh to Kumbhshyam temple	210.15 Cum		Cum		
10.	Provision for C.R. (Course Rubble) stone masonry dwarf wall in cement coarse sand mortar 1:5 (1 Cement: 5 Coarse Sand) including curing etc. complete.					
(A)	Rear gate Vijay Stambh to Kumbhshyam temple	147.10 Cum		Cum		
11.	Provision for providing M.S. Angle Railing (Grill) with 40x40x6mm, Angle and 40x6mm Flat frame, 12mm square bars spacing 10 Cm C/c distance shuttering and 8cm spikes of top with both side 100x90mm size column support and fixing in cement concrete block 1:2:4 (0.25x0.20x0.20) as					

	per the drawing/design including cost of materials, nut, bolts etc. complete, Size of M.S. railing (Grill)-2.00x0.75M					
(A)	Rear gate Vijay Stambh to Kumbhshyam temple					
(i)	Supply of M.S Grill panel	312 Nos/ 9771.84 Kg		Kg		
(ii)	Fixing of M.S Grill panel	312 Nos		Nos		
	Total (i) & (ii)					
13.	Provision for two or more coat of enamel paint on M.S. angle railing (Grill fencing) and iron gate surface over base coat of Red oxide primer etc. complete					
(A)	Rear gate Vijay Stambh to Kumbhshyam temple	541.88 Sqm		Sqm		
14.	Provision for fixing 75mm thick stone coping on the top of the dwarf/boundary wall with combination mortar 1:5 ( 1 cement: 5C.sand) cement, C.Sand mortar including curring etc. complete					
(A)	Rear gate Vijay Stambh to Kumbhshyam temple	210.15 Sqm		Sqm		
15.	Provision for Flush pointing on C.R. Stone masonry dwarf wall, pillars, in lime, surkhi, Coarse sand, mortar 1:1:1 (1 unslacked lime:1surkhi:1corsesand) including curing etc. complete.					
(A)	Rear gate Vijay Stambh to Kumbhshyam temple	653.80 Sqm		Sqm		
16.	Provision for erecting and dismantling three legged wooden scaffolding for execution of work with labour and material etc. complete					

(A)	Rear gate Vijay Stambh to Kumbhshyam temple	1868 Sqm		Sqm		
17.	Provision for supply of water by water tanker form source to site for work execution approx lead 7km.(4500liter capacity)					
(A)	Rear gate Vijay Stambh to Kumbhshyam temple	50 nos		Nos		

Note: The eligible approved/registered contractors with CPWD/PWD/RAILWAY/P&TMES/ASI who have valid TIN & PAN and supply/work experience in the previous two years in ASI/State Archaeology may submit the tender

Signature and seal of the Contractor

Superintending Archaeologist (i/c)

Should this tender be accepted, I/We hereby agree to abide by and fulfil all the terms and provisions of the said conditions annexed hereto so far as applicable, and/or in default thereof to forfeit and pay to the President of India or his successor in office the sum of money mentioned in the said conditions. A sum of Rs. \_\_\_\_\_\* is herewith forwarded in Cash/Treasury Challan as earnest money. If I/We fail to commence the work to specified in the above memorandum or if I/We fail to deposit the amount of security deposit specified against (ii) (a) in the above memorandum in accordance with clause 1 of the said conditions of contractor I/We agree that the said President or his successors in office shall, without prejudice to any other right or remedy, shall be retained by his towards such security deposit. I/We further agree that the said President or his successors in office shall also be at liberty to cancel the acceptance of the tender if I/We fail to deposit security amount to aforesaid.

\* Give particulars & numbers

Signature and seal of contractor

Address

Signature of witness to Signature of tender

Address

Dated the 2015

The above tender is hereby accepted by me behalf of the President of India.

Dated :

Signature of the officer by whom the tender is accepted

## Terms & Condition of Tender

1. Tenders should always be placed in sealed covers (wax-sealed/tape sealed/gum sealed) with the name of the work written on the envelopes.
2. Earnest money should be submitted in the form of Demand Draft drawn in favour of the Superintending Archaeologist, Jodhpur Circle on a Scheduled Bank /FDR duly pledged in favour of the Superintending Archaeologist, Jodhpur Circle must accompany each tender.
3. The contractor, whose tender is accepted, will be required to furnish (unless exempted) a security deposit for the due fulfilment of his contract, such sum as will amount.
  - 10% in the case of works costing up to Rs. 1, 00,000/- of the estimated cost of the work put to tender.
  - In the case of works costing more than Rs. 1,00,000/- and up to 2,00,000 to 10% on the first Rs. 1,00,000/- and 7.5% on the balance and
  - In the case of works costing more than Rs.2,00,000/- to 10% on the first Rs. 1,00,000/- and 7.5% on the next Rs 1,00,000/- and 5% on the balance subject to a maximum of Rs. 1,00,000/-
4. The Security Deposit will be collected by the deductions from the running bill of the contractor at the rates mentioned above. The Earnest Money Deposit placed at the time of tender will be treated as a part of the security deposit. The security amount will also be accepted in shape of Demand Draft in favour of Superintending Archaeologist, Jodhpur Circle/ FDR pledged in favour of Superintending Archaeologist, Jodhpur Circle etc. drawn on Scheduled Banks.
5. Special care should be taken to write the rates and amounts in figures as well as in words and in such a way that interpretation is not possible. In case of figures the words 'Rs'. should be written before the figures of rupees and word 'p' after

the decimal figures and in case of words the words Rs Proceeds and the word paisa should be written at the end. Unless the rate is in whole rupees and not followed by the word 'ONLY', it's should invariably be up to two decimal places. While quoting the rates in the schedule of quantities the rate in words should be written closely following the figure and it would not be written in the next line.

6. The contractor should quote the rate and amount in figure as well as in words. The amount for each item should be worked out and the total for all items should be given.
7. Rates quoted by the contractor in item rate tender in figures and words shall be accurately filled in so that there is no discrepancy in the rates written in figures and words.
8. Whenever the rates quoted by the contractor in figures and in words tally but the amount is not worked out correctly, the rate quoted by the contractor will be taken as correct and not the amount.
9. The rate quoted should include all VAT/Sales tax etc. ASI will not entertain any claim whatsoever in this regard.
10. In case contractor's signature on tender is fixed in an Indian Language, the rate/ amount/ percentage above or below should also be written in the same language. In the case of illiterate contractors the rates/percentage should be attested by a witness.
11. The tender should be signed by the contractor/authorised signatory in case of a firm. All tenders should have the signature of a witness. The seal of the contractor/firm should be fixed below the signature.
12. All corrections/over writings in case of rate/amount/ percentage etc. should be duly attested with signature of the contractor/ authorised signatory.
13. The discretion of acceptance of a tender, will rest with the Circle/Branch Officer/Regional Director/ Director General, A.S.I who does not bind himself to accept the lowest tender,

and reserve to himself the authority to reject any or all of the tenders received, without the assigning any reason. Any tender, in which any of the prescribed conditions are not fulfilled or are incomplete in any respect is liable to be rejected.

14. Canvassing in connection with tenders is strictly prohibited and the tender submitted by the contractors who resort to canvassing is liable to be rejected.
15. On the issue of the work order, the contractor will execute the work. If he fails to do so within the stipulated time or he withdraws afterwards, his EMD will be forfeited in full. No enhancement of rates for any reason will be permitted after opening of the tender.
16. On acceptance of the tender, the name of the accredited representative(s) of the contractor who would be responsible for taking instructions for the Circle/Branch Officer shall be communicated to the Circle/Branch Officer.
17. The contractor must produce income-tax clearance certificate in revised form as notified under Ministry of Finance O.M No. 67/30/69/ITAE dated 2<sup>nd</sup> July, 1970, and other relevant documents before the tender can be sold to him. If he downloads the same from website, he should enclose them with the tender. If he found to be ineligible, his tender will be rejected.
18. The contractor shall not be permitted to tender for works in the Archaeological Survey of India, Circle/Branch Office (Responsible for award and execution of contracts) in which his near relative is posted as an officer in any capacity.
19. No engineer of Gazetted rank or other Gazetted Officer employed in Engineering or Administrative duties in an Engineering Department of the Government of India is allowed to work as a contractor for a period of two years of his


retirement from Government service, without the previous permission of the Government of India as aforesaid before submission of the tender or engagement in the contractor's service.

20. The tender of the work shall not be witnessed by a contractor or contractors who himself/themselves/has /have tendered or who may tender for the same work.
21. The tenderer apart from being a class II (B&R) contractor must associate himself with agencies of the appropriate class which are eligible to tender for sanitary and water supply and drainage installation.
22. The contractor shall comply with the provisions of the Apprentices Act, 1961, and the rates and orders issued there under from time to time. If he fails to do so, his failure will be a breach of the contract and the Circle/Branch officer may in his discretion cancel the contract. The contractor shall also be liable for any pecuniary liability arising on account of any violation by him of the provisions of the Act.
23. Contractor should visit the working site prior to tendering.
24. The material should be supplied / Work executed as per the specification.
25. Arrangement for water/ scaffolding/ T&P articles will be made by the contractor
26. The supply of materials is subject to voids as per CPWD/IS/ASI specifications.
27. The quantity of work/materials can be increased/decreased at the site during work or before placing work/supply order.

Signature of the contractor  
Authorised signatory with seal

Superintending Archaeologist



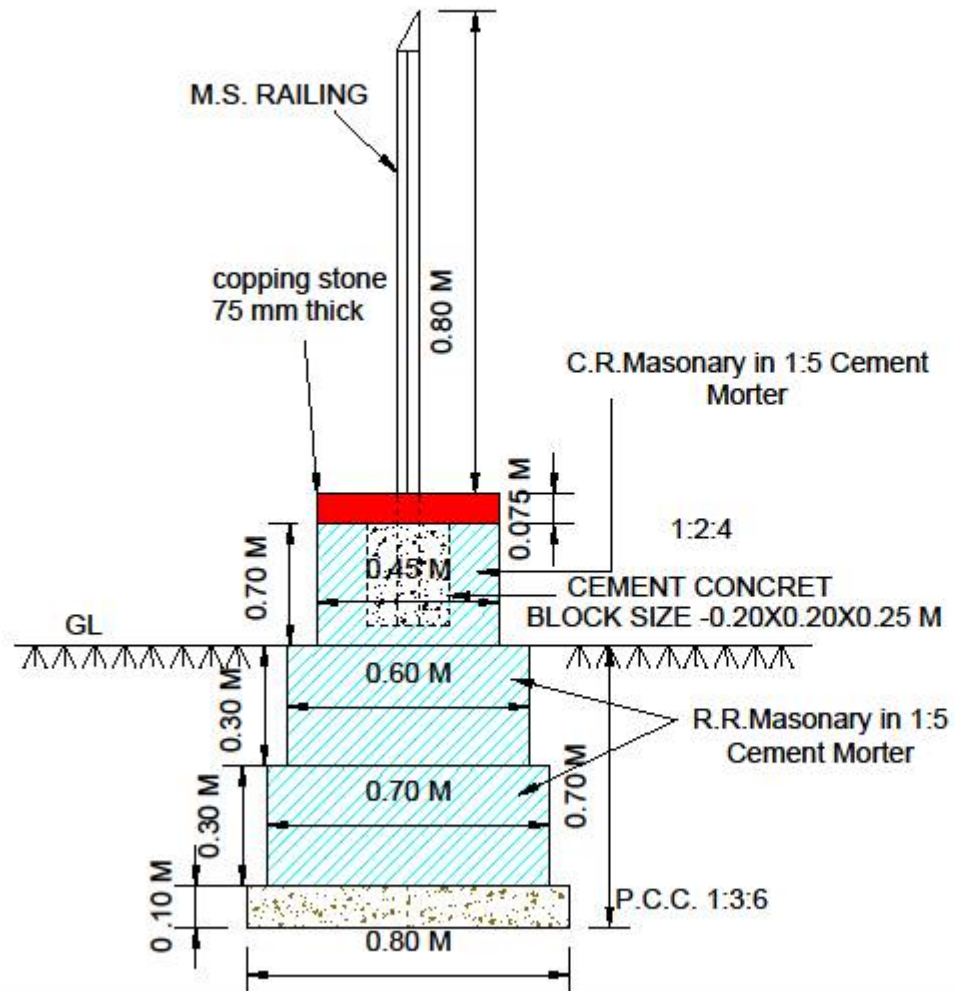

DRG. NO. JDH/4

CHITTAURGARH FORT

Chittaurgarh, Dist. Chittaurgarh

F.NO 04/76/Fen-CHT/MW(P)/2015-16/W

Fencing of Protected Areas from Rear of Vijaya Stambh to Kumbhashyam temple part (A)

Detail of masonry for MS Grill fencing at Area part A Vijay Stambh to Kumbhashyam Temple


- COPPING STONE
- R.R STONE MASONRY
- P.C.C. 1:3:6

Conservation Asst  
Archaeological Survey of India  
Chittaurgarh Sub-Circle

Asst Suptg Archl Engineer  
Archaeological Survey of India  
Jodhpur Circle

Superintending Archaeologist I/c  
Archaeological Survey of India  
Jodhpur Circle

SIZE OF M.S. RAILING :- 1.50M X 0.90M

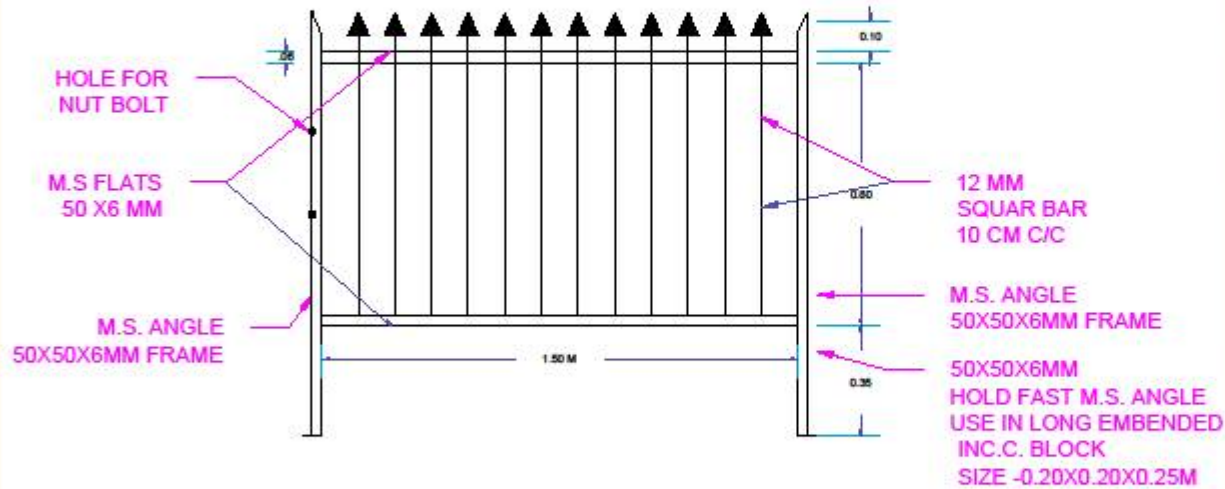

DRG. NO. JDH/4

CHITTAURGARH FORT

Chittaurgarh, Dist. Chittaurgarh

F.NO. 04/78/Fen-CHTMMWP/2015-18/M

Fencing of Protected Area from Rear gate of Vijaya Stambh to Kumbhashyam temple Part (A)

Design of MS Grill to be erected in Area part A Rear Gate of Vijaya Stambh to Khumbhashyam temple

Conservation Asst  
Archaeological Survey of India  
Chittaurgarh Sub-Circle

Asst Supv Asst Engineer  
Archaeological Survey of India  
Jodhpur Circle

Superintending Archaeologist Uo  
Archaeological Survey of India  
Jodhpur Circle